



High Power Diode Modules

$$\begin{aligned} I_{\text{FRMS}} &= 2 \times 300 \text{ A} \\ I_{\text{FAVM}} &= 2 \times 165 \text{ A} \\ V_{\text{RRM}} &= 800\text{-}1800 \text{ V} \end{aligned}$$

V_{RSM}	V_{RRM}	Type
V	V	
900	800	MDD 142-08N1
1300	1200	MDD 142-12N1
1500	1400	MDD 142-14N1
1700	1600	MDD 142-16N1
1900	1800	MDD 142-18N1



Symbol	Test Conditions		Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$		300	A
I_{FAVM}	$T_C = 100^{\circ}\text{C}; 180^{\circ}$ sine		165	A
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C};$	t = 10 ms (50 Hz), sine	4700	A
	$V_R = 0$	t = 8.3 ms (60 Hz), sine	5000	A
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	4100	A
	$V_R = 0$	t = 8.3 ms (60 Hz), sine	4300	A
$\int i^2 dt$	$T_{VJ} = 45^{\circ}\text{C}$	t = 10 ms (50 Hz), sine	110 000	A ² s
	$V_R = 0$	t = 8.3 ms (60 Hz), sine	104 000	A ² s
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	84 000	A ² s
	$V_R = 0$	t = 8.3 ms (60 Hz), sine	77 000	A ² s
T_{VJ}			-40...+150	°C
T_{VJM}			150	°C
T_{stg}			-40...+125	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 min	3000	V~
	$I_{ISOL} \leq 1 \text{ mA}$	t = 1 s	3600	V~
M_d	Mounting torque (M6)	2.25-2.75/20-25	Nm/lb.in.	
	Terminal connection torque (M6)	4.5-5.5/40-48	Nm/lb.in.	
Weight	Typical including screws		120	g

Features

- International standard package
- Direct copper bonded Al_2O_3 -ceramic base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- UL registered, E 72873

Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies


Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Symbol	Test Conditions	Characteristic Values	
I_R	$T_{VJ} = T_{VJM}; V_R = V_{RRM}$	20	mA
V_F	$I_F = 300 \text{ A}; T_{VJ} = 25^\circ\text{C}$	1.3	V
V_{T0}	For power-loss calculations only	0.8	V
r_T	$T_{VJ} = T_{VJM}$	1.3	m Ω
Q_S	$T_{VJ} = 125^\circ\text{C}; I_F = 300 \text{ A}, -di/dt = 50 \text{ A}/\mu\text{s}$	550	μC
I_{RM}		235	A
R_{thJC}	per diode; DC current	0.21	K/W
	per module	0.105	K/W
R_{thJK}	per diode; DC current	0.31	K/W
	per module	0.155	K/W
d_S	Creepage distance on surface	12.7	mm
d_A	Strike distance through air	9.6	mm
a	Maximum allowable acceleration	50	m/s ²

Data according to IEC 60747 and refer to a single diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions

Dimensions in mm (1 mm = 0.0394")

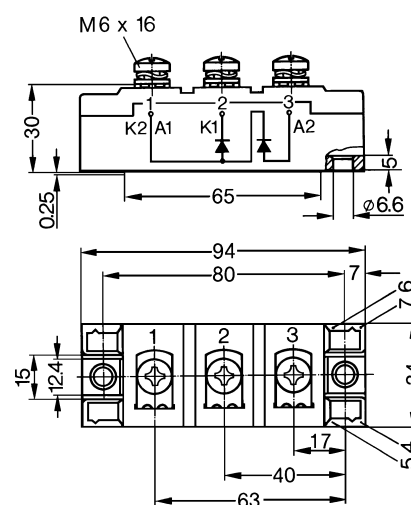

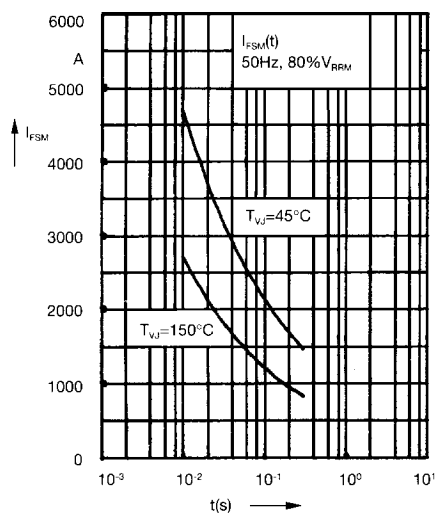


Fig. 1 Surge overload current
 I_{FSM} : Crest value, t : duration

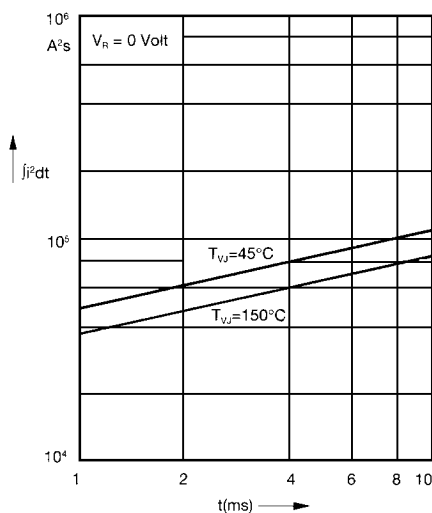


Fig. 2 $\int i^2 dt$ versus time (1-10 ms)

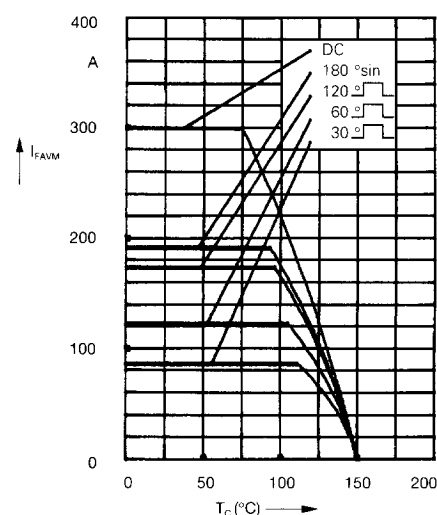


Fig. 2a Maximum forward current at case temperature

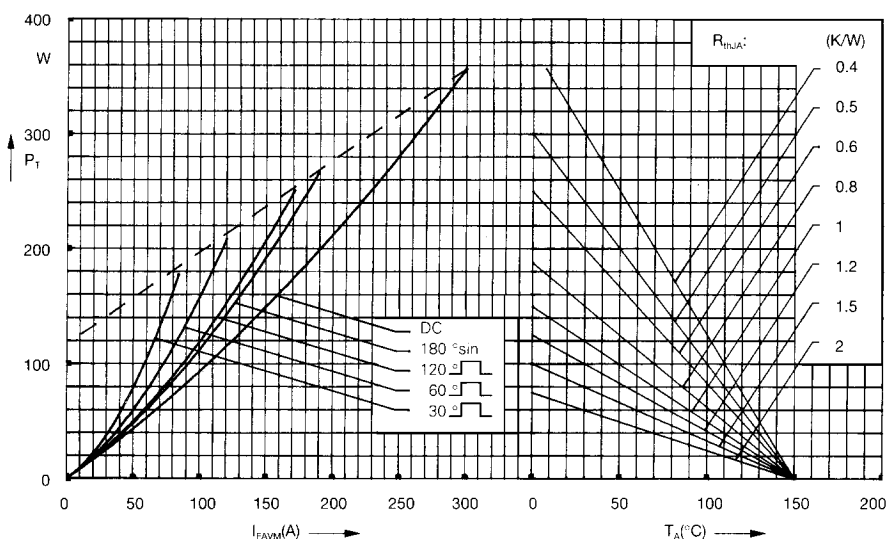


Fig. 3 Power dissipation versus forward current and ambient temperature (per diode)

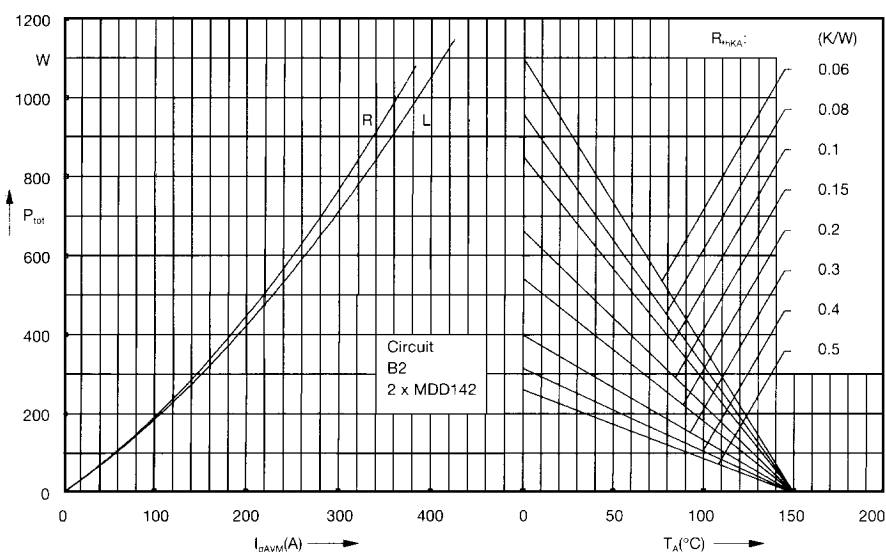


Fig. 4 Single phase rectifier bridge:
Power dissipation versus direct output current and ambient temperature
R = resistive load
L = inductive load

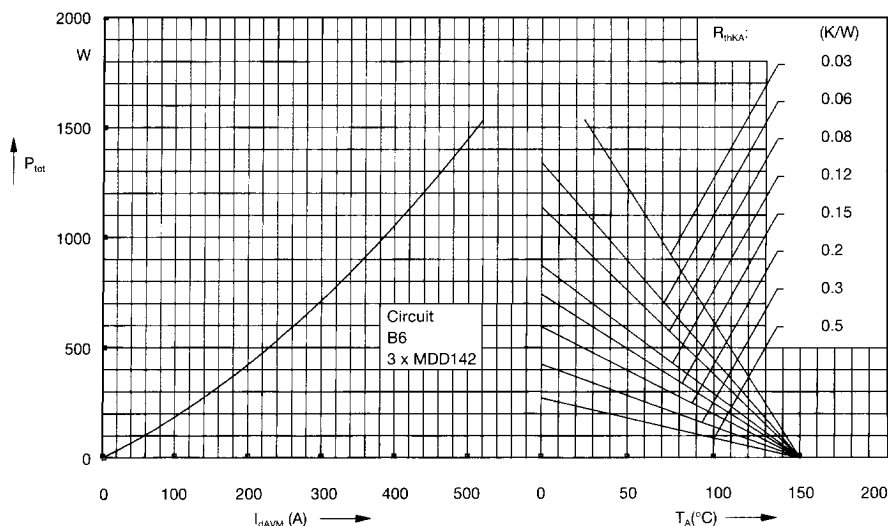


Fig. 5 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

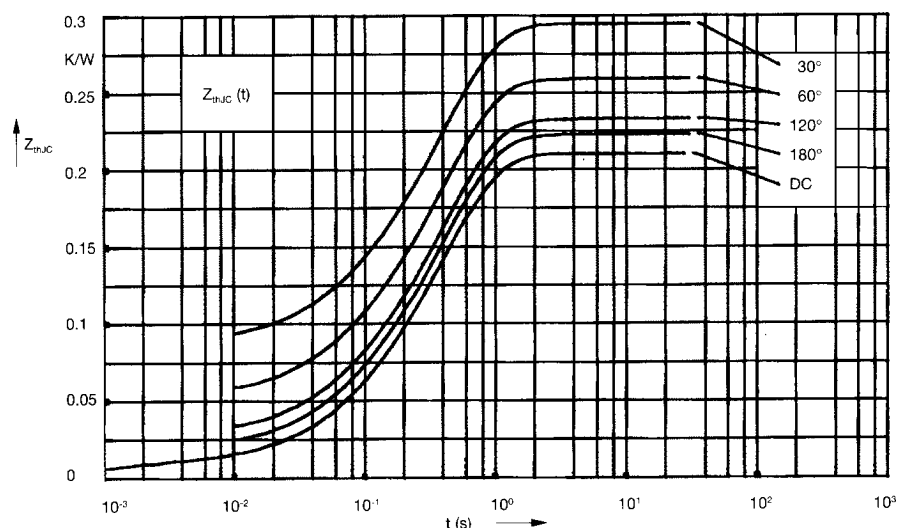


Fig. 6 Transient thermal impedance junction to case (per diode)

R_{thJC} for various conduction angles d:

d	R_{thJC} (K/W)
DC	0.210
180°	0.223
120°	0.233
60°	0.260
30°	0.295

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0087	0.001
2	0.0163	0.065
3	0.185	0.4

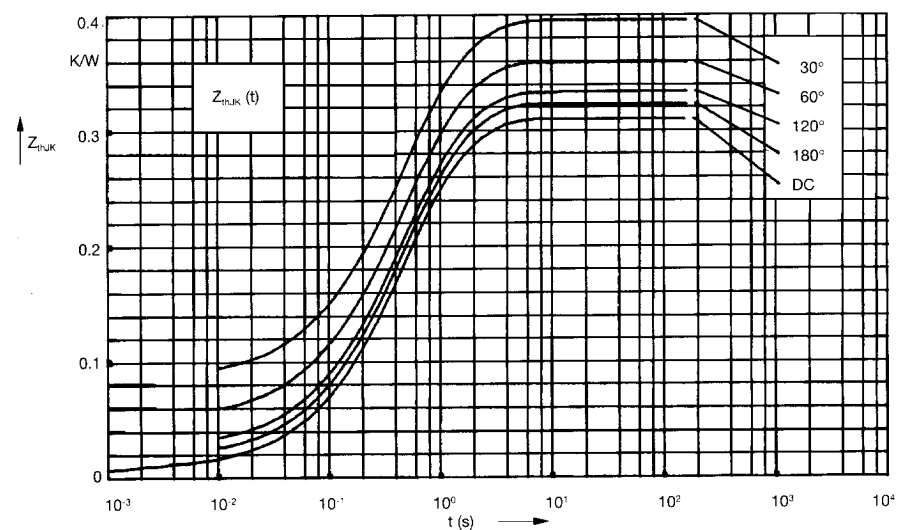


Fig. 7 Transient thermal impedance junction to heatsink (per diode)

R_{thJK} for various conduction angles d:

d	R_{thJK} (K/W)
DC	0.31
180°	0.323
120°	0.333
60°	0.360
30°	0.395

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0087	0.001
2	0.0163	0.065
3	0.185	0.4
4	0.1	1.29